


# HFTT150-01

## Telemetry Transmitter


3061 Industry Drive, Lancaster, PA 17603 • Tel 717-397-2777 • Fax 717-397-7079 • www.herley.com

### FEATURES:

- 2200.0 to 2300.0 MHz single frequency (factory set)
- Stability 0.002%
- 150 milliWatt power output
- +28 VDC,  $\pm 4$  VDC @ 200 milliAmps maximum
- Frequency deviation, 1 MHz maximum
- Temperature, -54°C to +85°C
- Shock, 200 g's, 1/2 sine, 11 msec, 3 axes
- Lightweight, less than 2 ounces

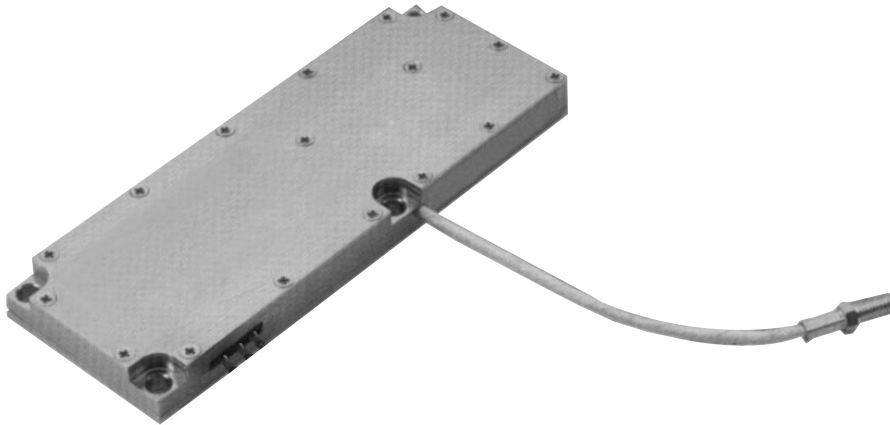

The design of the HFTT150-01 series utilizes the latest in modern devices and circuitry. They are all solid-state to provide a reliable product with extremely long operating life.

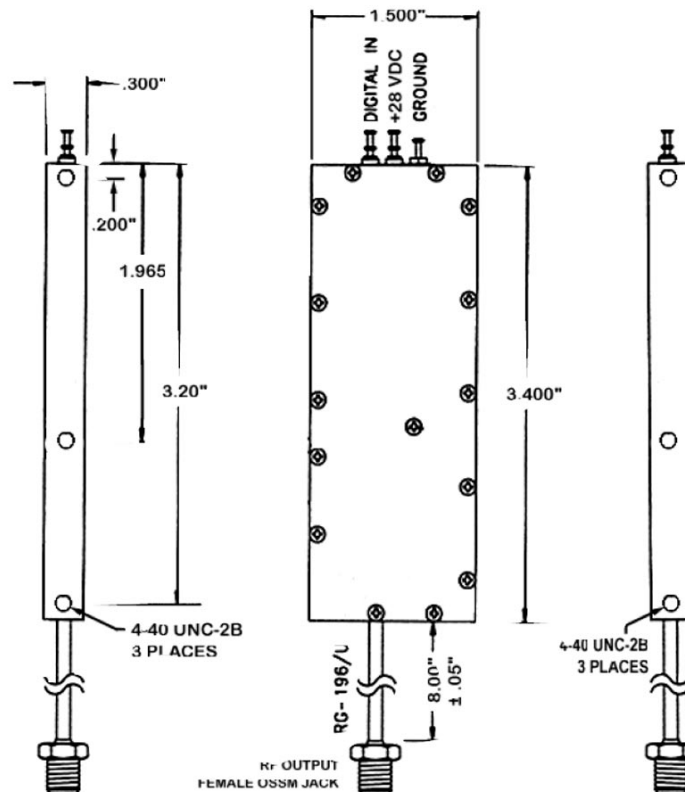

Typical Outline - does not show all features - not to be used for generation of control drawings. For detailed outline drawing of a specific part number please contact Herley Industries, Inc.

EXPORT SALES OF THIS PRODUCT ARE SUBJECT TO U.S. GOVERNMENT APPROVAL.  
SALES WILL NOT BE APPROVED TO COUNTRIES PROHIBITED BY THE INTERNATIONAL TRAFFIC IN ARMS REGULATIONS (ITAR).