

HFTT410DL-1

Digital Transmitter



3061 Industry Drive, Lancaster, PA 17603-4025 • Tel 717-397-2777 • Fax 717-397-7079 • www.herley.com

FEATURES:

The HFTT410DL-1 Digital Transmitter is an L-band, Continuous Wave (CW) FM Transmitter used primarily to relay telemetry data to a receiving ground station. The units are compact and desirable for those applications where DC power conservation, size and weight are at a premium. Applications include missiles, aircraft, unmanned airborne vehicles (UAV), sounding rockets, drone targets and space launch vehicles.

The design of the HFTT410DL-1 utilizes the latest in modern devices and circuitry. It is all solid-state to provide a reliable product with extremely long operating life.

- 10 Watt minimum power output
- Lightweight, 14 ounces maximum (397 grams)
- All solid-state design
- Reverse polarity protection

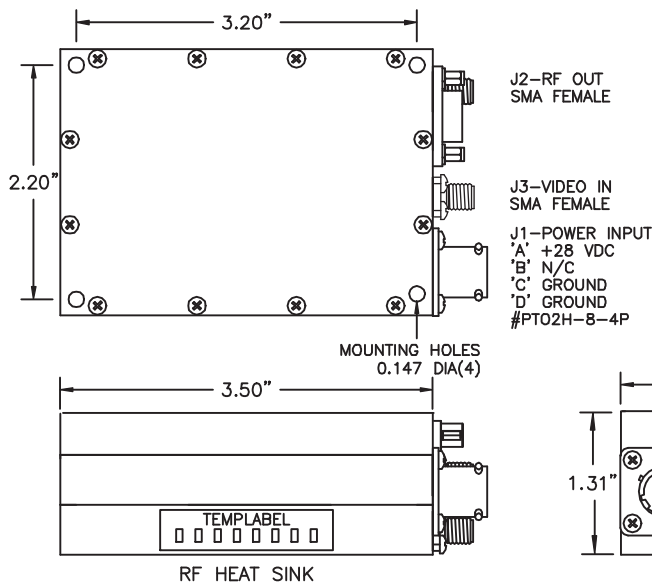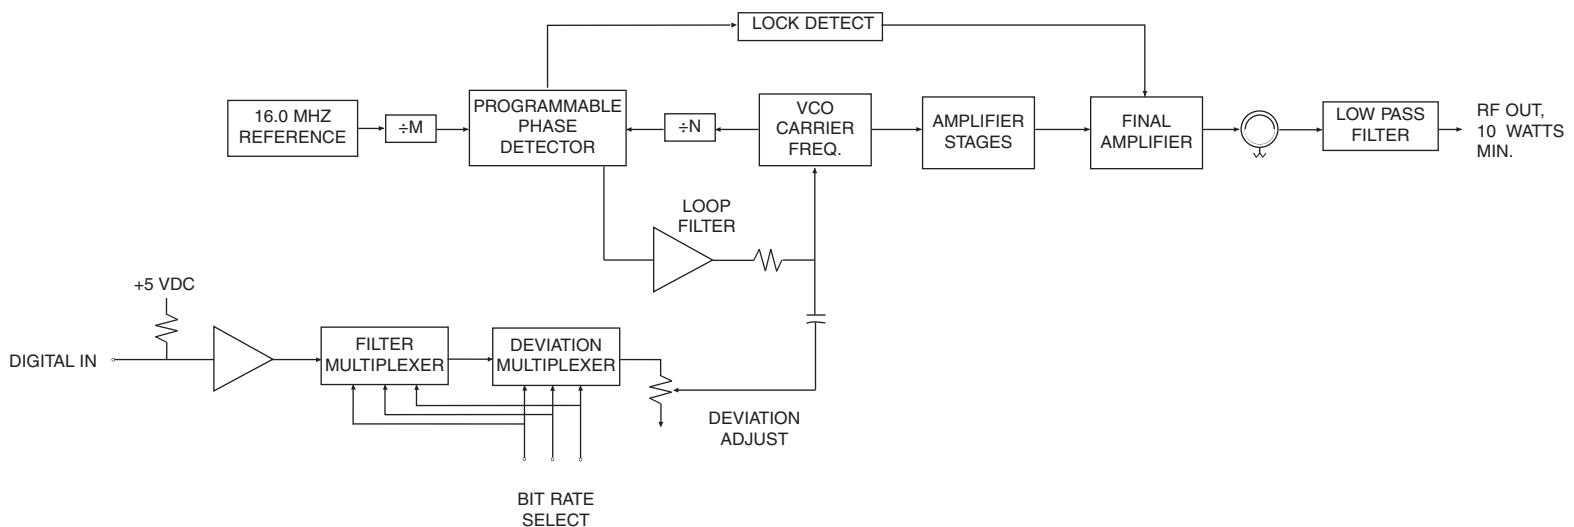

J4 PIN	3	4	5	BIT RATE (NRZ)
	0	0	0	BIT RATE #1
	0	0	1	BIT RATE #2
	0	1	0	BIT RATE #3
	0	1	1	BIT RATE #4
	1	0	0	BIT RATE #5
	1	0	1	BIT RATE #6
	1	1	0	BIT RATE #7
	1	1	1	BIT RATE #8

"1" = OPEN, "0" = GND

